





U7 Pro XG
U7-Pro-XG

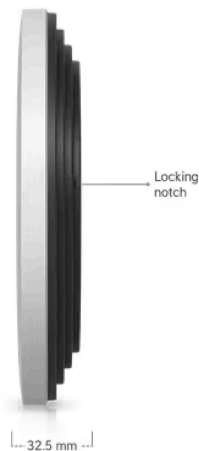

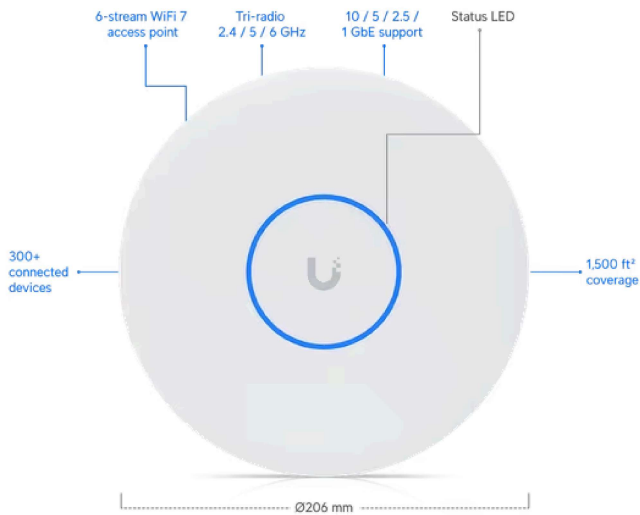

^ Overview

Dimensions

Ø206 x 32.5 mm
(Ø8.1 x 1.3")

WiFi Standard

WiFi 7 ⓘ

Spatial Streams

6

Coverage Area

140 m² (1,500 ft²)

Max. Client Count

300+

Uplink

10 GbE

Mounting

Ceiling, Wall
(Lite Mount Included)

Power Method

PoE+

^ Performance

MIMO

6 GHz

2 x 2 (DL/UL MU-MIMO)

5 GHz

2 x 2 (DL/UL MU-MIMO)

2.4 GHz

2 x 2 (DL/UL MU-MIMO)

Max. Data Rate

6 GHz



5.8 Gbps (BW320)

5 GHz

4.3 Gbps (BW240)

2.4 GHz

688 Mbps (BW40)

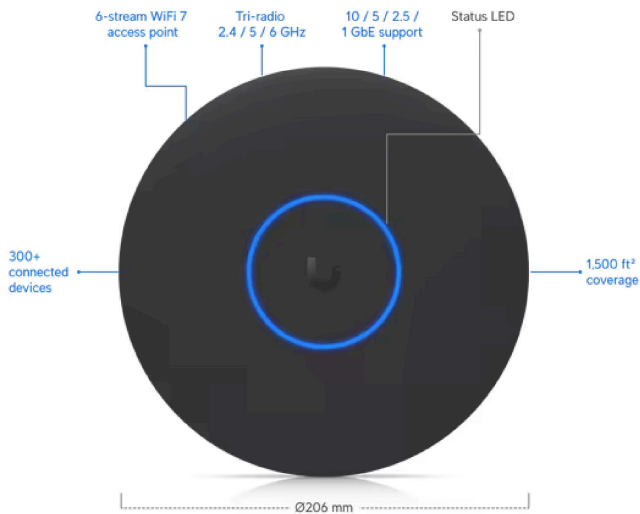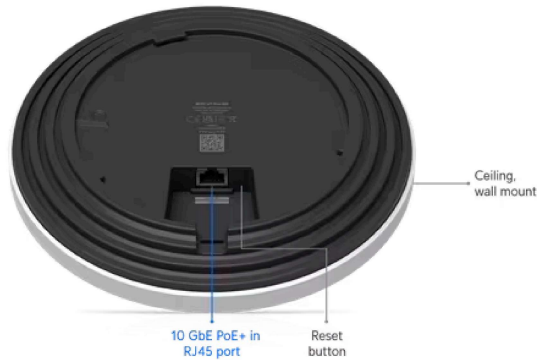

Antenna Gain

6 GHz	6 dBi
5 GHz	5 dBi
2.4 GHz	4 dBi

Max. TX Power

6 GHz	24 dBm
5 GHz	26 dBm
2.4 GHz	23 dBm

Max. BSSIDs

8 per Radio

Supported Data Rates

802.11be (WiFi 7)

6 GHz: 7.3 Mbps to 5.8 Gbps (MCS0 - MCS13 NSS1/2, EHT 20/40/80/160/320)
5 GHz: 7.3 Mbps to 4.3 Gbps (MCS0 - MCS13 NSS1/2/3/4, EHT 20/40/80/160/240)

802.11ax (WiFi 6)

7.3 Mbps to 2.4 Gbps (MCS0 - MCS11 NSS1/2, HE 20/40/80/160)


802.11ac (WiFi 5)

6.5 Mbps to 1.7 Gbps (MCS0 - MCS9 NSS1/2, VHT 20/40/80/160)


802.11n

6.5 Mbps to 300 Mbps (MCS0 - MCS15, HT 20/40)

^ Features

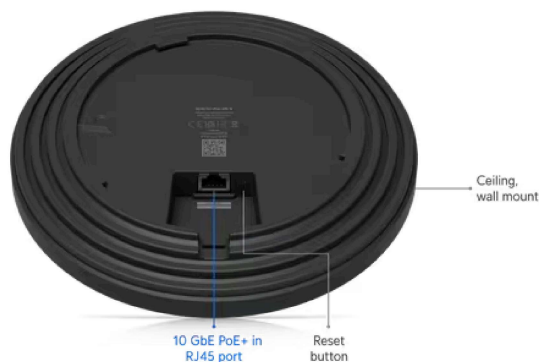

Wireless Meshing	✓
Band Steering	✓
802.11v BSS Transition Management	✓
802.11r Fast Roaming	✓
802.11k Radio Resource Management (RRM)	✓
Advanced Radio Management	✓
Passpoint (Hotspot 2.0)	✓
Captive Hotspot Portal	
Custom Branding Landing Page	✓
Voucher Authentication	✓
Payment-Based Authentication	✓
External Portal Server Support	✓
Password Authentication	✓
Guest Network Isolation	✓
Private Pre-Shared Key (PPSK)	✓
WiFi Speed Limiting	✓
Client Device Isolation	✓
WiFi Schedules	✓
RADIUS over TLS (RadSec)	✓

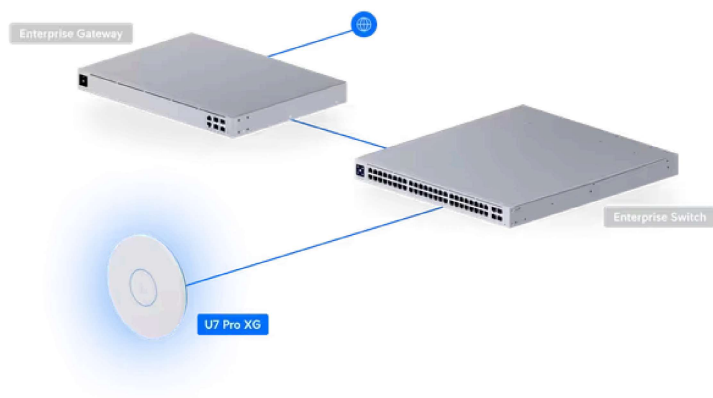

Dynamic RADIUS-assigned VLAN	✓
^ Hardware	
Max. Power Consumption	22W
Supported Voltage Range	42.5-57V DC
Networking Interface	(1) 10 GbE RJ45 port
Weight	750 g (1.7 lb)
Management	Ethernet
Enclosure Material	UV-stabilized polycarbonate, aluminum alloy
Mount Material	Stainless steel (SUS304), galvanized steel (SGCC)
LEDs	
System	White/Blue
Channel Bandwidth	HT 20/40, VHT 20/40/80/160, HE 20/40/80/160, EHT 20/40/80/160/240/320 (MHz)
Operating Frequency	US/CA: 2400 - 2472 MHz U-NII-1: 5150 - 5250 MHz U-NII-2A: 5250 - 5350 MHz U-NII-2C: 5470 - 5725 MHz U-NII-3: 5725 - 5850 MHz U-NII-5 to U-NII-8: 5925 - 7125 MHz Worldwide:

	2400 - 2483.5 MHz 5150 - 5850 MHz 5925 - 7125 MHz	i
Ambient Operating Temperature	-30 to 40° C (-22 to 104° F)	
Ambient Operating Humidity	5 to 95% noncondensing	
NDAА Compliant	✓	
Certifications	CE, FCC, IC, Anatel: 06630-25-08356	
^ Software		
Application Requirements		
UniFi Network	Version 9.0.114 and later (U7 Pro XG - White) Version 9.1.120 and later (U7 Pro XG - Black)	